

PART 2D


GEOTECHNICAL INVESTIGATION TO ESTIMATE AQUIFER PARAMETERS

2007 ADS Stormwater Workshop

- Note the word is estimate & not determine.
- Must appreciate the physical meaning of each aquifer parameter.
- Aquifer, in this sense, does not refer to the Florida aquifer but usually the uppermost sand aquifer into which the pond is excavated.
- This task should be conducted by an experienced geotechnical engineer.
- Two important references:
 - SWFWMD Training Workshop on SHWT (1998 Edition)
 - Section 7.2 of SJRWMD Special Publication SJ93-SP10

VISUALIZATION OF THE AQUIFER PARAMETERS

2007 ADS Stormwater Workshop

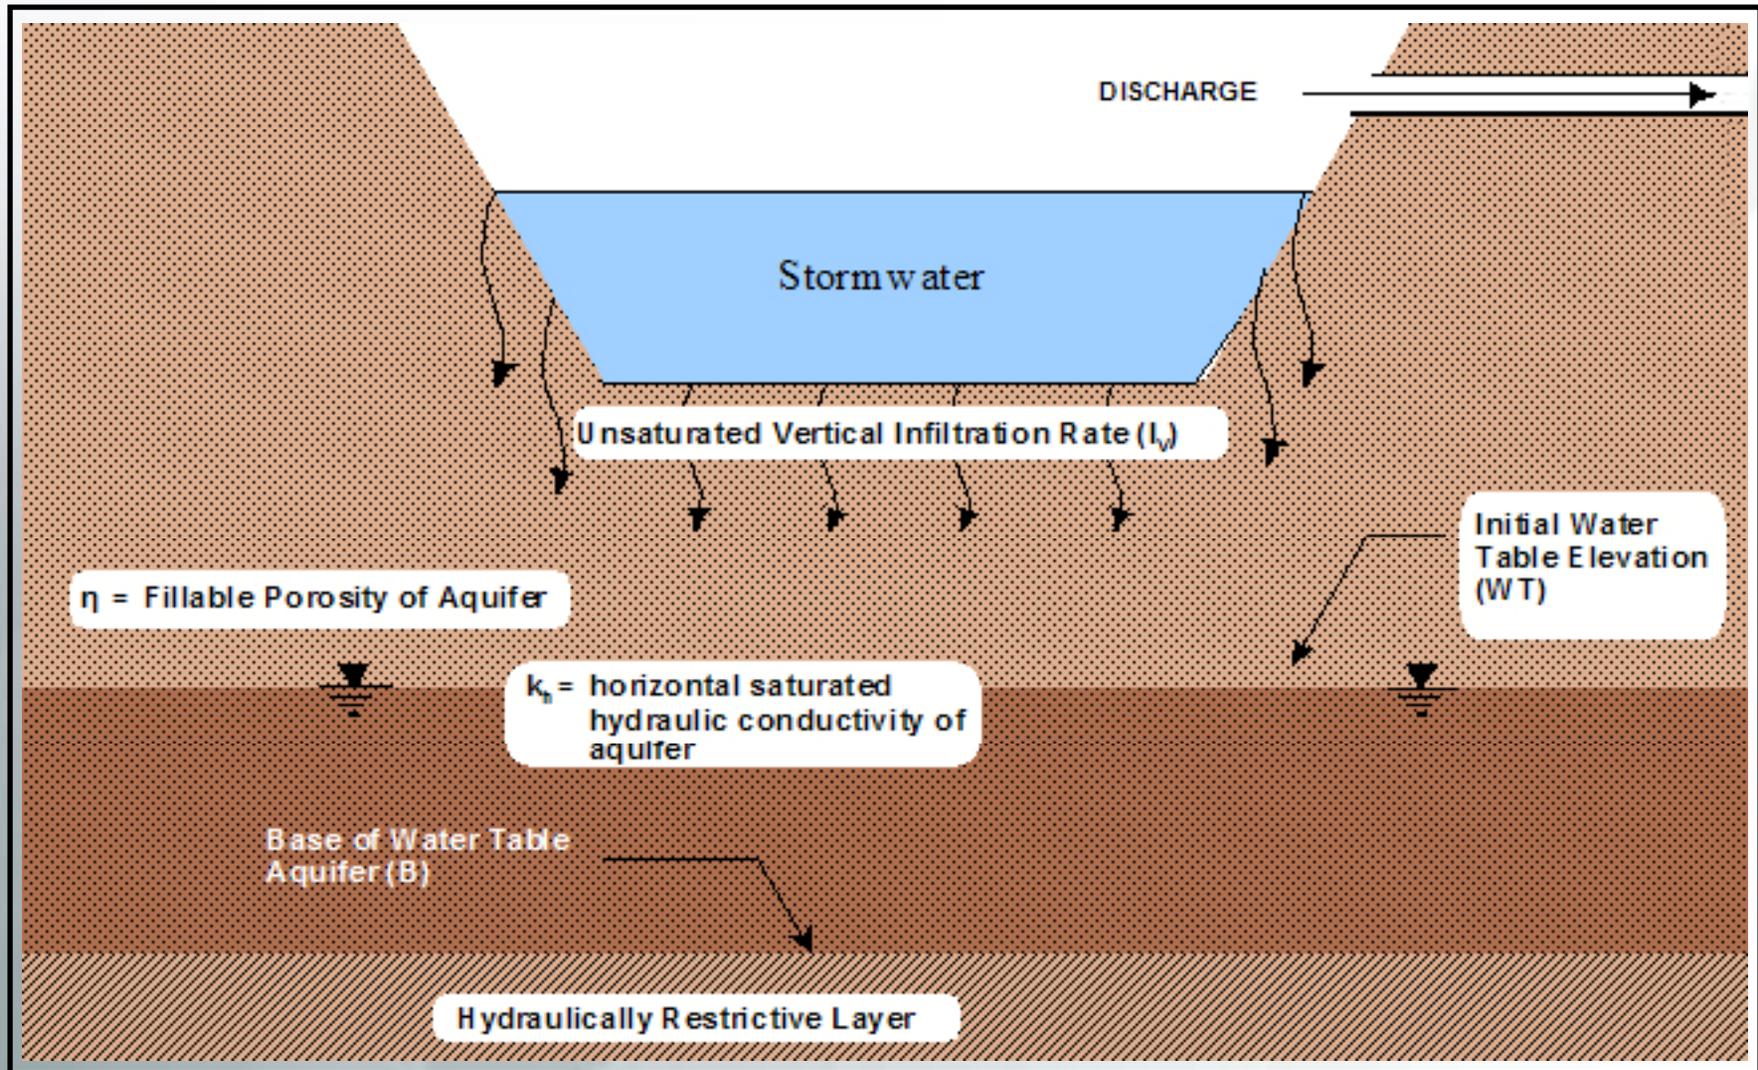


GEOTECHNICAL INVESTIGATION - STORMWATER PONDS

2007 ADS Stormwater Workshop


- Objective of the soils report is to provide numerical values for the following aquifer parameters:
 - Seasonal high water table (ft NGVD)
 - Seasonal fluctuation of water table (ft) [only for wet pond]
 - Base of effective aquifer (ft NGVD)
 - Weighted horizontal hydraulic conductivity of effective aquifer (ft/day)
 - Fillable porosity
 - Unsaturated vertical infiltration rate (ft/day) [only for dry pond where unsaturated flow is being considered]

- Parameters should be clearly stated in one section or in a table of the soils report. It should not be buried within the verbiage of the report.

SAMPLE END RESULT OF GEOTECH INVESTIGATION

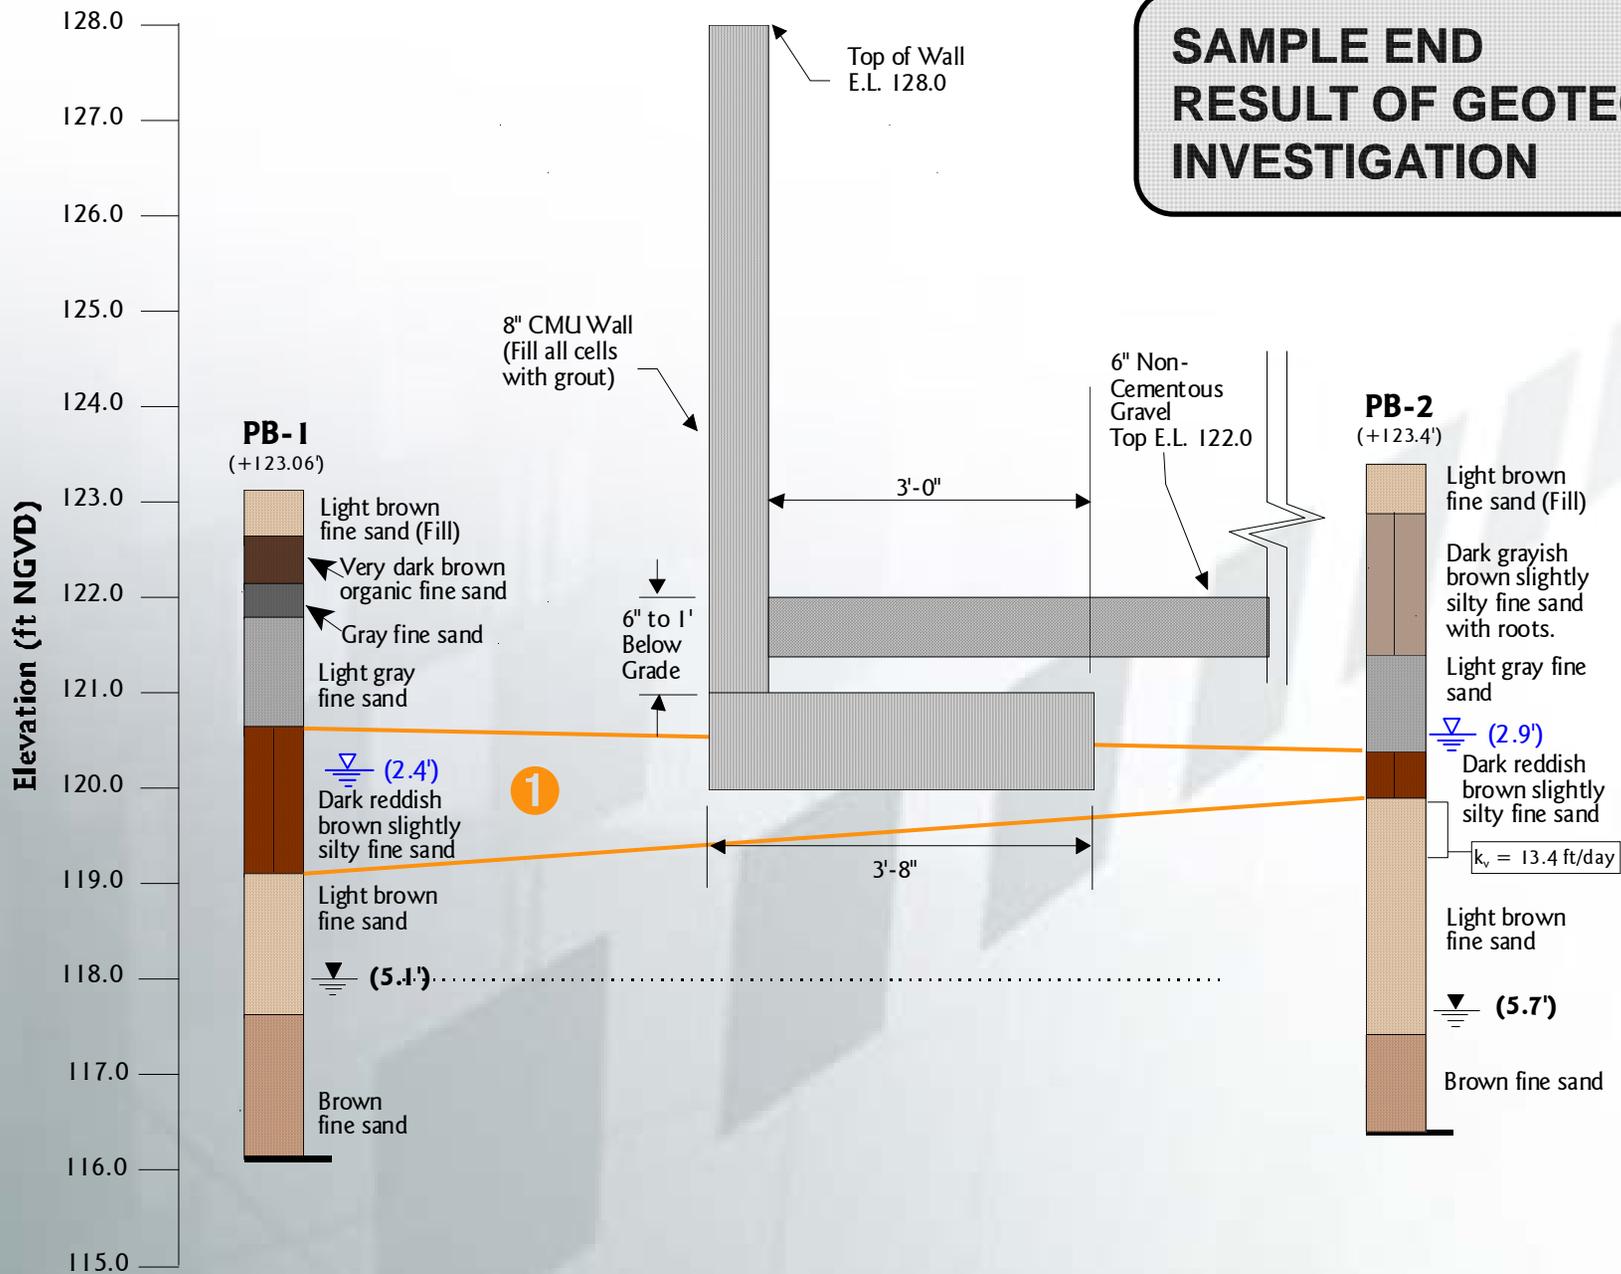

SAMPLE END RESULT OF GEOTECH INVESTIGATION

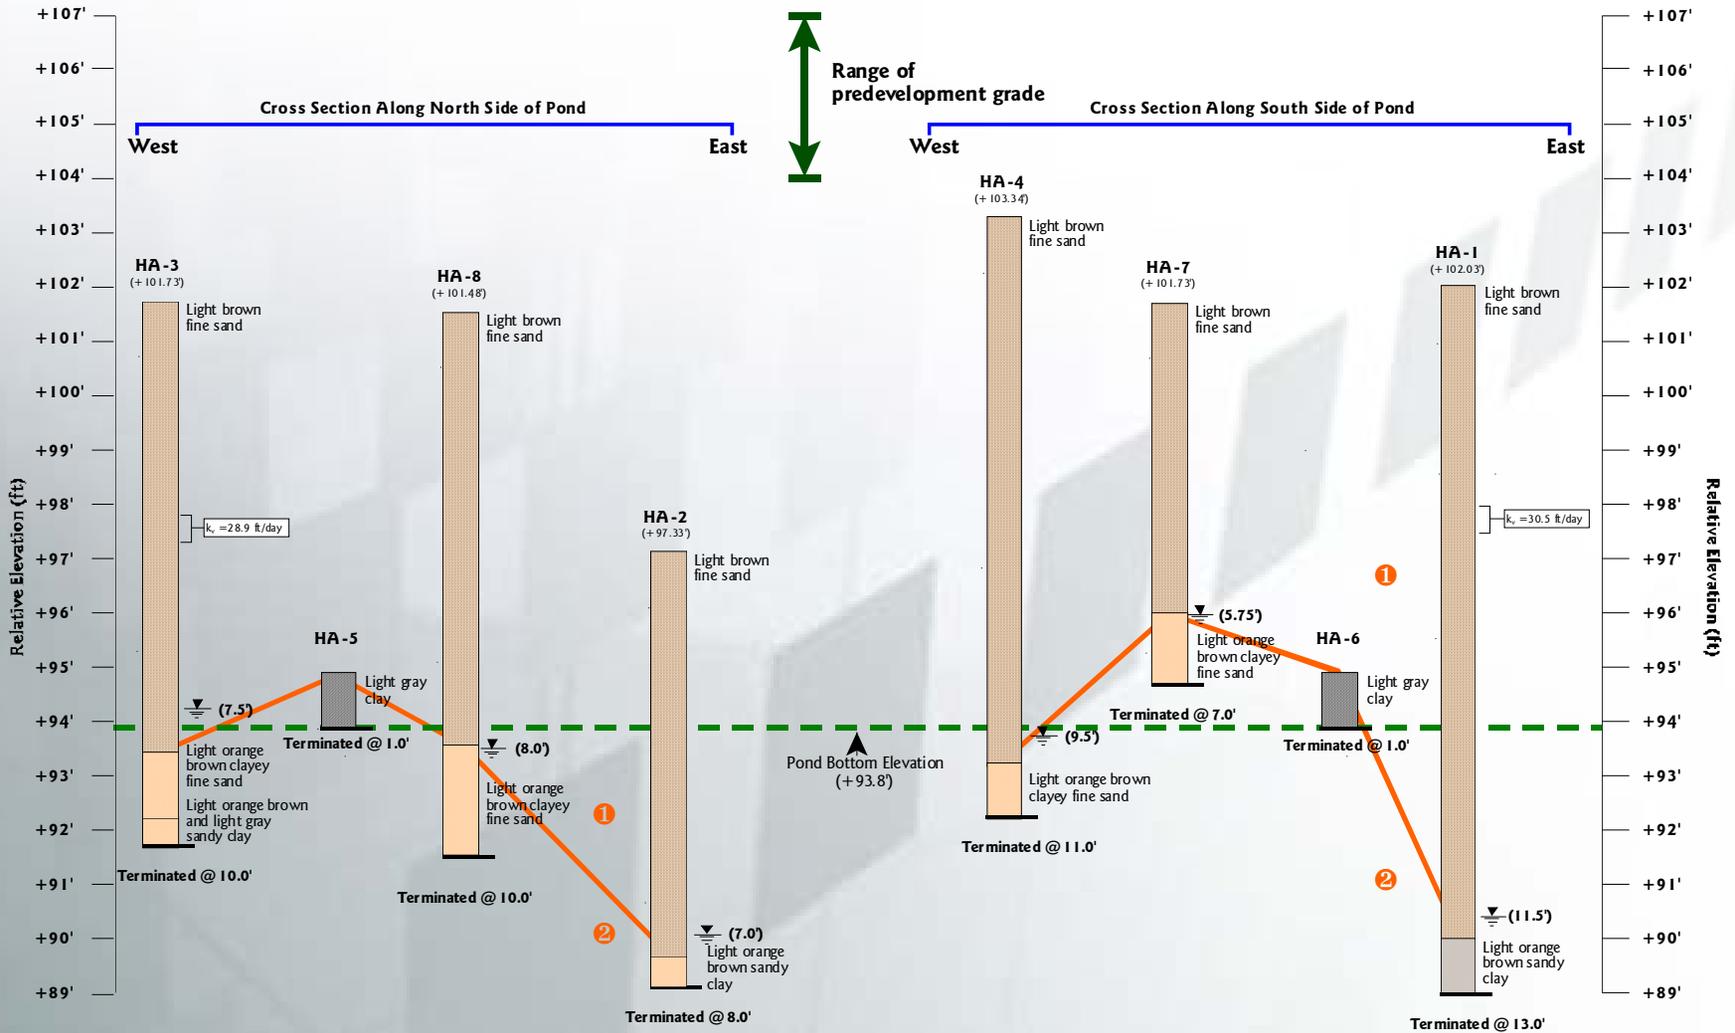

GEOTECHNICAL INVESTIGATION - STORMWATER PONDS

2007 ADS Stormwater Workshop


➤ Review of published data to include

- USGS quad map (look at lay of the land and any closed depressions, and contributing drainage basins; good practice to field verify drainage basin divides).
- NRCS (formerly SCS) soils map. NRCS data is now available on the internet.
- Aerial photos
- Sub regional map of potentiometric surface of Florida aquifer and compare to land surface elevation or water table elevation

➤ Map data to include

- Location of pond within development
- Location of adjacent water bodies and wetlands and their water elevations

**REVIEW USGS
QUADRANGLE
MAP**

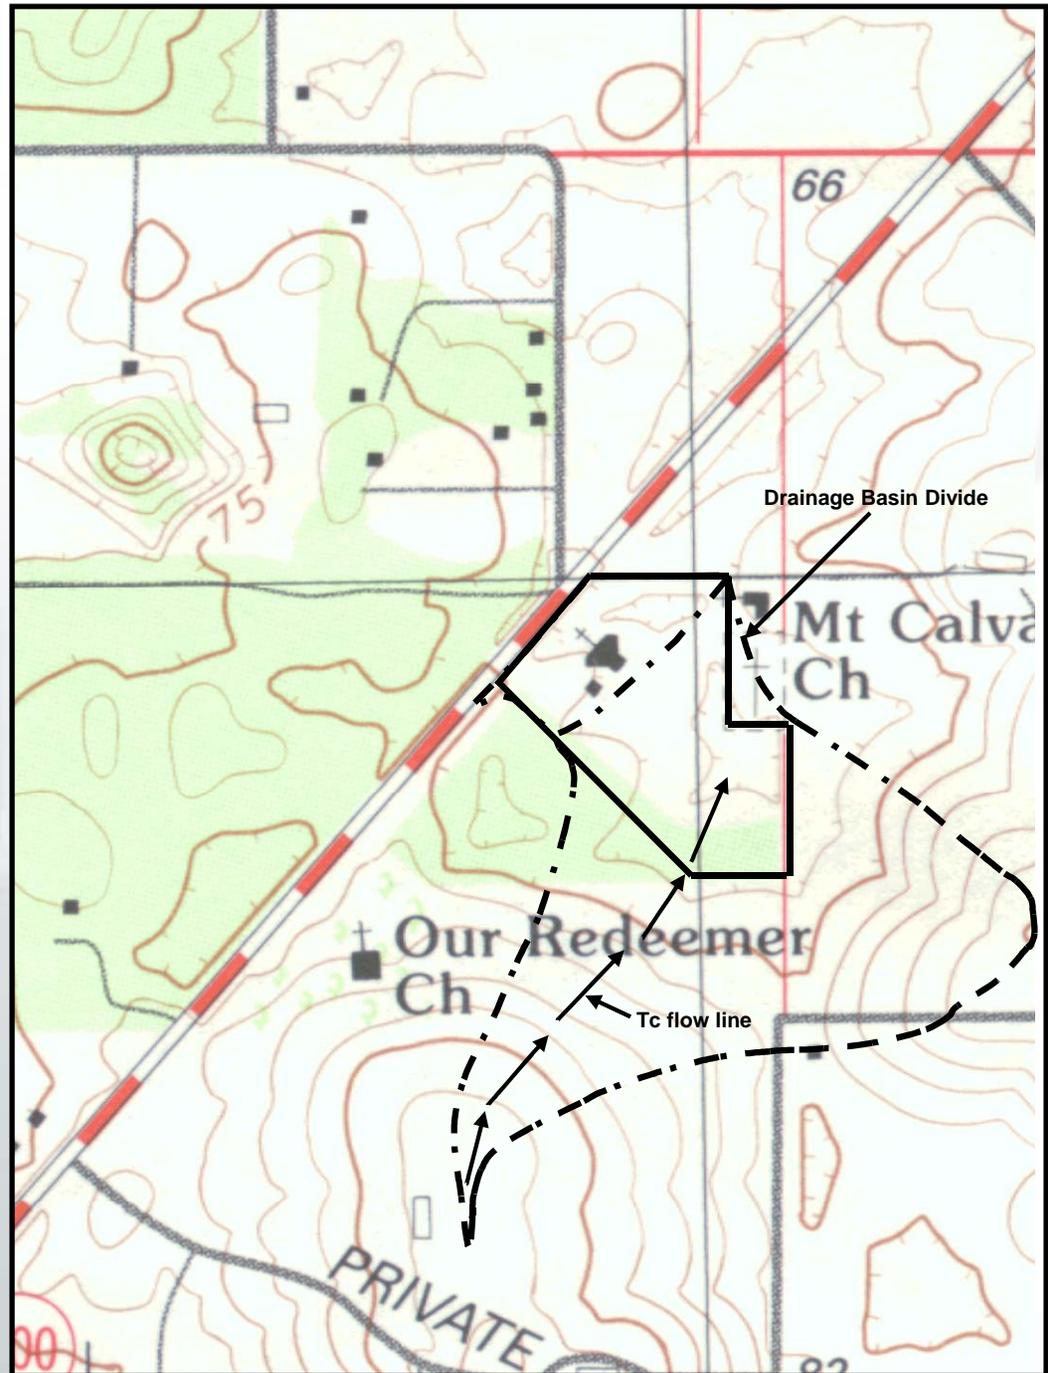

REVIEW NRCS SOILS MAP



Legend:

CaB - Candler sand, 0 to 5 % slopes

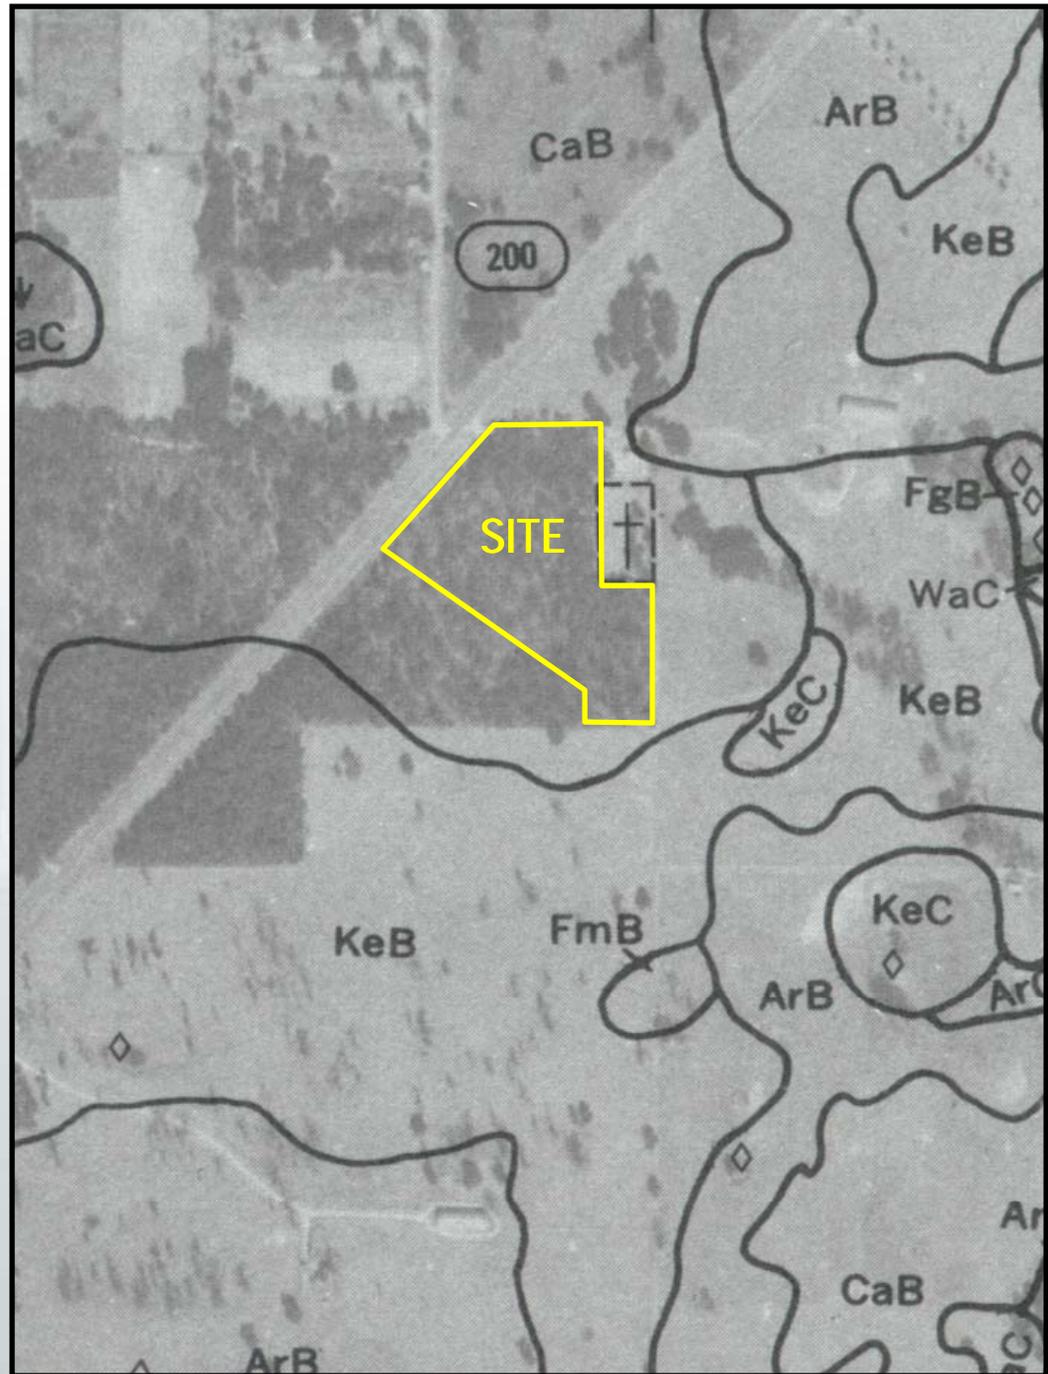


Table 3: Key SCS Characterization Data for Arredondo Sand [ArB (0-5% slopes)]

<p>This is a nearly level to sloping, well drained soil that occurs as both large and small areas in the upland. The water table is at a depth of more than 72 inches.</p>		
<p>Hydrologic Soil Group (HSG)</p>		<p>A</p>
<p>REPRESENTATIVE SOIL PROFILE</p>		
Depth	Soil Color & Texture	Permeability
0 - 7 in	dark grayish brown sand	12 to 40 ft/day
7 - 18 in	mixed yellowish brown and dark yellowish brown sand	
18 - 46 in	yellowish brown sand	
46 - 65 in	strong brown sand	
65 - 70 in	strong brown loamy sand	4 to 12 ft/day
70 - 90 in	strong brown fine sandy loam	

Minimum Requirements for Soils Reports

2007 ADS Stormwater Workshop

- Site-specific geotechnical data to include:
 - Location of borings within or adjacent to pond. The geotechnical engineer should select the number of pond borings based on the size of the pond. For guidance on the number of borings, refer to page 162 of SJ93-SP10.
 - Soil profiles with stabilized water table measurements at time of drilling
 - Results of hydraulic conductivity tests (if performed). Report should also state type of hydraulic conductivity test performed and reference the location and depth of the test
 - Explicit recommendations for each aquifer parameter

Estimating Aquifer Parameters

2007 ADS Stormwater Workshop

- Aquifer thickness: Refer to Section 7.2.1 of SJRWMD SJ93-SP10 for the recommended type and number of soil borings. Also refer to this section for how the soil profile should be interpreted.
- Fillable porosity: Refer to Section 7.2.4 of SJRWMD SJ93-SP10 for recommendations on how to estimate fillable porosity. Rules of thumb: 30% for HSG "A", 25% for HSG "B" & "C", and 20% for HSG "D".
- Weighted horizontal hydraulic conductivity: Refer to Section 7.2.3 of SJRWMD SJ93-SP10 for recommended test procedures and how the weighted average should be computed.
- Unsaturated vertical infiltration rate: use Double Ring Infiltrometer test (described later). Apply minimum safety factor of 2 to measured rate.

Estimating Aquifer Parameters (Continued)

2007 ADS Stormwater Workshop

- Seasonal high water table: Refer to Section 7.2.2 of SJRWMD SJ93-SP10 for the recommended procedure. This technical procedure cross-references a paper I wrote on estimating the seasonal high water table. We will discuss this subject in some more detail in this workshop.
- Seasonal fluctuation of the water table: typically 3 to 4 ft in the pine flatwood soils and 6 ft or more in the sand ridge soils.

Typical Correlation Between Fines Fraction & Hydraulic Conductivity for Florida Fine Sands

2007 ADS Stormwater Workshop

